


GPS Splitter 1 in 2 passiv AS 41-2P

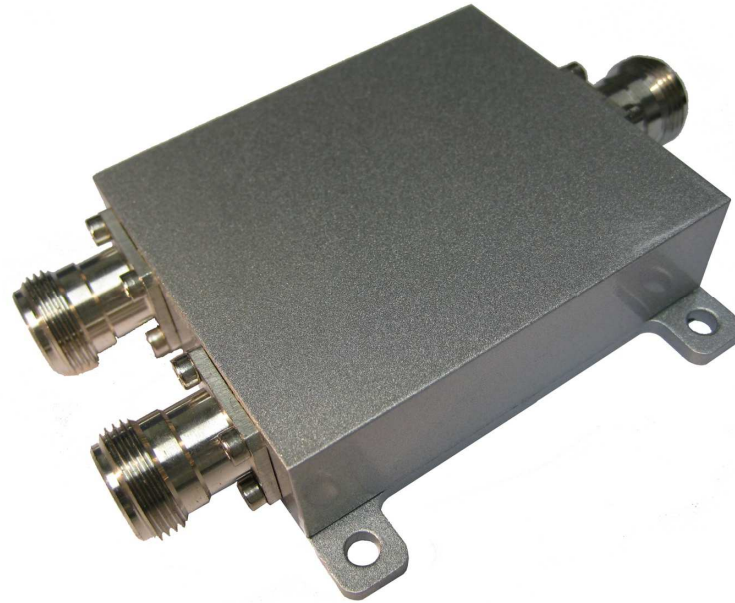

GPS-Splitter 1 in 2 passive

Technical Data:

Art.-No.:	3010013-2P
Frequency:	GPS L1
Verlust:	3 dB
Connector:	N (Input and Output)
Ports:	DC Pass on all Ports (DC block option)
Impedance:	50 Ohm
Input SWR:	2.0:1
Housing:	Aluminium
Dimensions:	108 mm x 79 mm x 22 mm
Weight:	235 g
Mounting:	with screws
Environment:	IP56, spritzwassergeschützt
Temperature:	- 20 ° ~ + 60 ° C

The splitter is used for running two receivers or repeaters with only one outdoor antenna.

Available also 50 Ohm caps if one port is not in use. Please order DC-Stops if you need to block DC on one or more of the ports!

Please ask us what you need exactly! We offer splitters with 2,4,8 or 16 outputs for all GNSS-bands and Rack Mount Splitter with 8,16 and 32 outputs.