


GPS Splitter 1 in 4 passiv

AS 41-4P



GPS Systems
for Signaldistribution

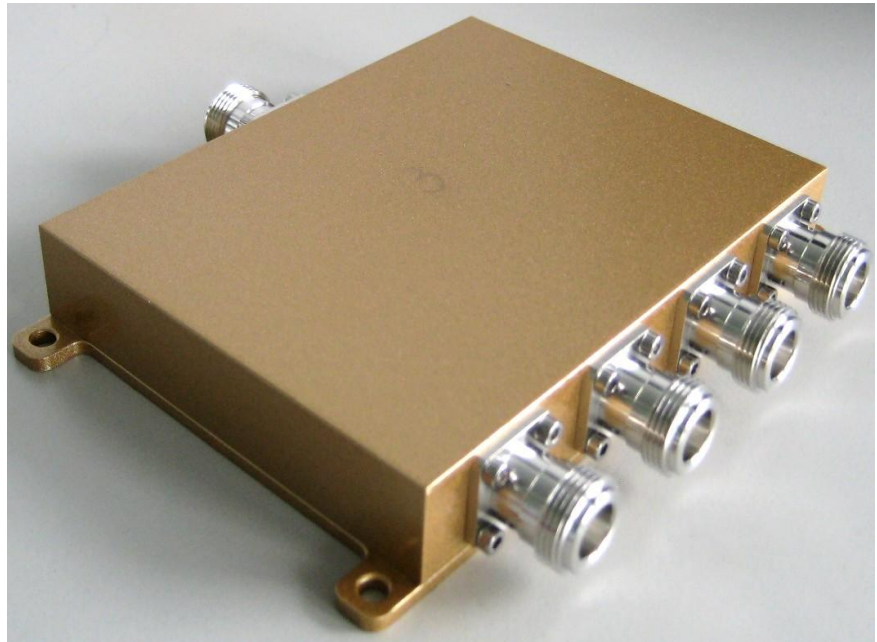

GPS-Splitter 1 in 4 passiv

Technical Data:

Art.-No.:	3010013-4P
Frequency:	GPS L1
Loss:	7,5 dB
Connector:	N(Input and Output)
Ports:	DC Pass all Ports (DC block option)
Impedance:	50 Ohm
Input SWR:	2.0:1
Housing:	Aluminium
Dimensions:	121 mm x 93 mm x 22 mm(without tags)
Weight:	585 g
Mounting:	with screws
Environment:	IP56, spritzwassergeschützt
Temperature:	- 20 ° ~ + 60 ° C

The splitter is used for running two receivers or repeaters with only one outdoor antenna.

Available also 50 Ohm caps if one port is not in use. Please order DC-Stops if you need to block DC on one or more of the ports!

Please ask us what you need exactly! We offer splitters with 2,4,8 or 16 outputs for all GNSS-bands and Rack Mount Splitter with 8,16 and 32 outputs.